


INLINE CARTRIDGES



**MAXIMUM FLOW RATE
3 LITRES PER MINUTE
MAXIMUM PRESSURE
125 PSI**

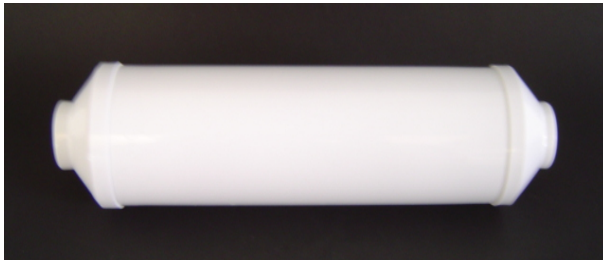

SPARES

PART #	DESCRIPTION
26/BM	1/4" CONNECTOR
26/E	1/4" TUBING
APP25	BRACKET 60-64MM
26/AX	BRACKET 50-52MM

PART #	SIZE		SERVICE LIFE (LITRES)	MICRON RATING	DESCRIPTION *QC = QUICK CONNECT
	OD (mm)	OH (mm)			
AIC2	50	260	5,700	10	GAC CARBON
AIC25	64	280	9,500	10	GAC CARBON
AIC2P	50	260	5,700	10	GAC CARBON / PHOSPHATE
AIC2PQ	50	260	5,700	10	GAC CARBON/PHOSPHATE WITH QC FITTINGS
AIC25KQ	64	280	9,500	10	GAC CARBON/ KDF WITH QC FITTINGS
AIC25PQ	64	280	9,500	10	GAC CARBON/POLYPHOSPHATE WITH QC FITTINGS
APIC2Q	50	260	5,700	10	PHOSPHATE ONLY WITH QC FITTINGS
GS10EXTRA	52	260	18,000	5	GAC CARBON/KDF 225G
GS210EXTRA	60	285	30,000	5	GAC CARBON/KDF 450G
GS10SED	52	260	-	5	POLYPROPYLENE (FOR SEDIMENT)
K5430BB	60	195	10,000	1	SILVER IMPREGNATED GAC CARBON
K5567	65	245	15,000	1	GAC CARBON/KDF