


Kleen-Plus®

NITRATE REMOVAL SYSTEM (WHOLE HOUSE)

FOR NITRATE REMOVAL

- Stomach aches similar to indigestion
- Skin Irritations



FEATURES

☑ Easy to Install

☑ High Quality materials for long life

☑ In-line system for farm and household applications


☑ Simple to maintain

Choice of electro-mechanical or automatic control module


SPECIFICATIONS				
MODEL	A DIA (mm)	B OH (mm)	C BED DEPTH (mm)	BED VOLUME (L)
735	180	1100	500	11
744	180	1350	500	18
948	230	1450	700	27
1054	260	1650	800	38
1252	300	1600	800	52
1465	360	1850	800	72

Higher flow rates than those recommended may result in lower water quality. For pH of less than 6, reduce flow of NF series by 30-50% to achieve adequate pH adjustment. Do not use on waters suffering bacterial contamination without adequate disinfection prior to the unit.

(Use our Ozone or UV systems for disinfection)



ORDERING INFORMATION:

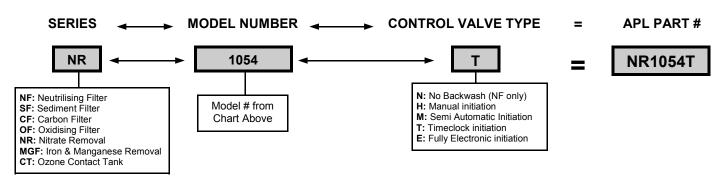

As each system is tailored to suit the particular application, unit sizes will be confirmed upon receiving water quality data and required duties.