


Kleen-Plus®

HIGH CAPACITY SEDIMENT FILTERS- MULTI-MEDIA

FOR SEDIMENT REMOVAL, FILTERS TO 25 MICRONS

- **Dirt**
- **Sand**
- **Clay**
- **Particles**
- **Contains 3 types of media—Sand, Brightwater and Anthracite for high dirt applications**

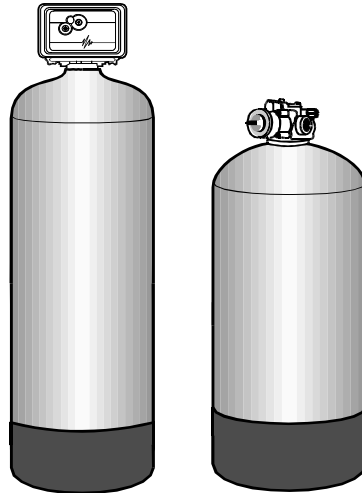


FEATURES

- ☑ Easy to Install
- ☑ High Quality materials for long life
- ☑ In-line system for farm and household applications
- ☑ Simple to maintain

SPECIFICATIONS

MODEL	A DIA (mm)	B OH (mm)	C BED DEPTH (mm)	BED VOLUME (L)	FLOW RATES (LPM)
735	180	1100	500	11	5-10
744	180	1350	500	18	10-15
948	230	1450	700	27	15-25
1054	260	1650	800	38	25-35
1252	300	1600	800	52	35-45
1465	360	1850	800	72	55-65

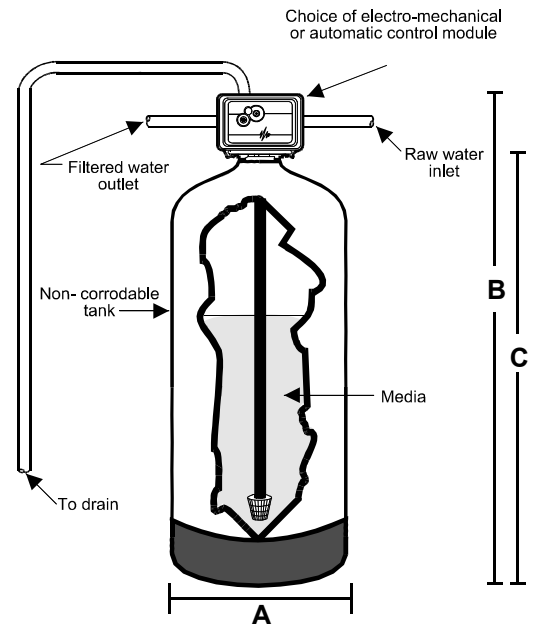

Higher flow rates than those recommended may result in lower water quality.
For pH of less than 6, reduce flow of NF series by 30-50% to achieve adequate pH adjustment. Do not use on waters suffering bacterial contamination without adequate disinfection prior to the unit.
(Use our Ozone or UV systems for disinfection)

ORDERING INFORMATION:

SERIES MODEL NUMBER CONTROL VALVE TYPE = APL PART #

SFM **1054** **T** = **SFM1054T**

NF: Neutrlising Filter
SF: Sediment Filter
CF: Carbon Filter
OF: Oxidising Filter
NR: Nitrate Removal
MGF: Iron & Manganese Removal
CT: Ozone Contact Tank

Model # from Chart Above

N: No Backwash (NF only)
H: Manual initiation
M: Semi Automatic Initiation
T: Timeclock initiation
E: Fully Electronic initiation

As each system is tailored to suit the particular application, unit sizes will be confirmed upon receiving water quality data and required duties.